






APPLICATION

- ELECTRIC SCALE
- LIGHTING
- INDUSTRY MEASURE EQUIPMENT


ORDERING INFORMATION:

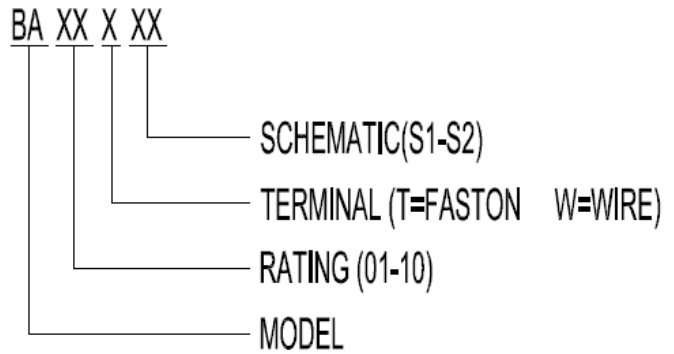

SCHEMATIC

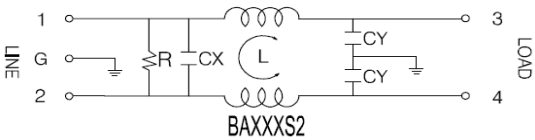
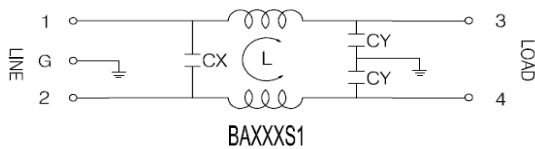


PHYSICAL DIMENSIONS(mm)

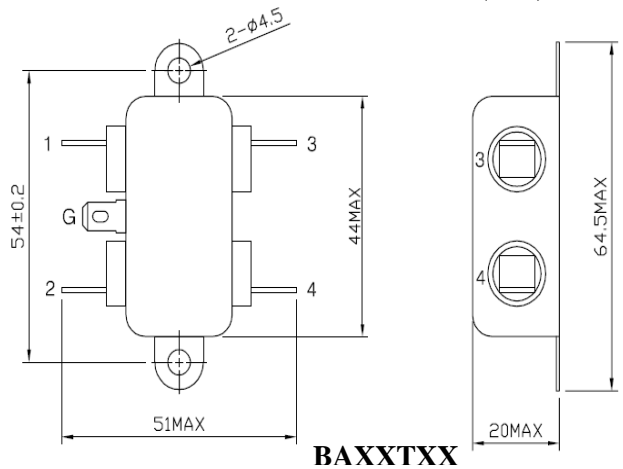


SPECIFICATION


RATED CURRENT	1A/3A/6A/10A
RATED VOLTAGE	125VAC/250VAC
POWER LINE FREQUENCY	50/60Hz
HIPOT RATING LINE TO LINE	1450VDC
HIPOT RATING LINE TO GROUND	2250VDC
LEAKAGE CURRENT	0.8mA MAX
INSULATION RESISTANCE	100MΩ MIN 500V DC
TEMPERATURE RISE	30°C MAX.
OPERATING TEMPERATURE	-25~+85°C

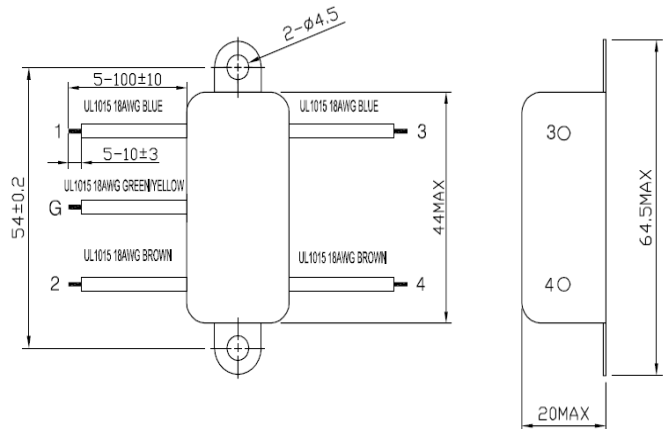


BA01



BA03

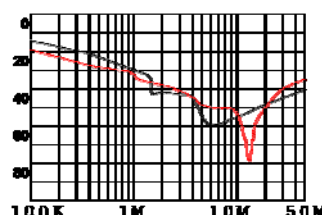

BA06



BA10

(— COMM.MODE(L-G)IN HZ —DIFF.MODE(L-L)IN HZ)